


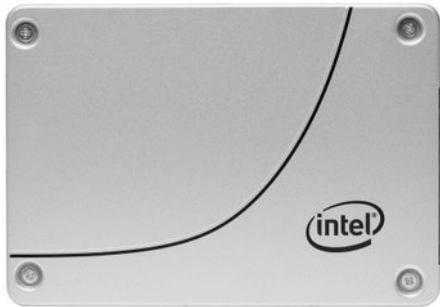

SSD Solidigm (Intel) S4610 3.84TB SATA 2.5 SSDSC2KG038T801 (DWPD 3)

Model: SSDSC2KG038T801

Manufacturer: SOLIDIGM

EAN: 735858363068

Product Code: 19586

R18,867

Harmonized System (HS) code: 84717070 | Non-operating vibration: 3.13 G | Random write (100% span): 42000 IOPS | Interface: Serial ATA | Market segment: Server | SSD ARK ID: 134916 | Processor family: Intel SSD D3 | SSD hardware encryption: AES 256 bit | Power consumption (active): 3.7 W | Status: Launched | SSD endurance rating: 15.2 PBW | Operating temperature (T-T): 0 - 70 °C | Intel® Smart Response Technology: No | Intel Smart Response Technology version: 0.00 | Intel High Endurance Technology (HET): No | Memory type: TLC 3D NAND | Write speed: 510 MB/s | Launch date: Q3'18 | Intel Rapid Start Technology version: 0.00 | Read latency: 36 µs | Random read (100% span): 96000 IOPS | Intel® Remote Secure Erase: No | SSD shock: 1000 G/0.5 msec | Operating shock: 1000 G | Hardware encryption: Yes | SSD form factor: 2.5" | SSD power consumption (idle): 1.1W | NVMe: No | Last change: 63903513 | Non-operating shock: 1000 G | SSD capacity: 3.84 TB | Drive capacity: 3.84 TB | Product colour: Silver | Product series: S4610 | Intel® Rapid Start Technology: No | Sequential reading: 560 MB/s | Component for: Server/workstation | Operating

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

shop.cssi.co.za | sales@cssi.co.za | +27 (11)541-9950

vibration: 2.17 G | Mean time between failures (MTBF): 2000000 h | SSD power consumption (active): 3.7W | Write latency: 37 µs | Data transfer rate: 6 Gbit/s | End-to-End Data Protection: Yes | Enhanced Power Loss Data Protection technology: Yes | Product codename: Youngsville Refresh | Power consumption (idle): 1.1 W | Product series: Intel® SSD D3-S4610 Series | SSD temperature monitoring: Yes | NAND flash type: TLC (Triple Level Cell) | Temperature monitoring and logging: Yes | Operating / non-operating shock: 1000 G/0.5 msec | Product family: Data center SSD | Read speed: 560 MB/s | Maximum operating temperature: 70 °C | Sequential writing speed: 510 MB/s | Security algorithms: 256-bit AES | Uncorrectable Bit Error Rate (UBER): 1 per 10¹⁷ bits read | Remote Secure Erase (RSE) technology version: 0.00 | Export Control Classification Number (ECCN): 5A992C | DWPD: 3 | Commodity Classification Automated Tracking System (CCATS): G162706

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

shop.cssi.co.za | sales@cssi.co.za | +27 (11)541-9950