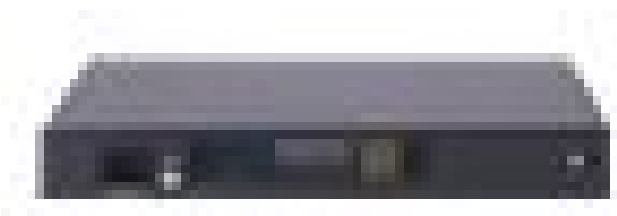

HPE MSR958 1GbE/Combo PoE Router

Model: JH301A

Manufacturer: HEWLETT PACKARD ENTERPRISE

EAN: 889296338208

Product Code: 202845

R32,299

The HPE FlexNetwork MSR958 router is a high-performance small-branch router that delivers integrated routing, security, SIP, embedded 802.11b/g/n WLAN connectivity, dual 3G/4G LTE, and fiber (SFP) in a single box. The MSR958 router solution delivers up to 300 Kbps forwarding with comprehensive IPv4 and IPv6 routing, MPLS, QoS, stateful firewall, network address translation (NAT), VPN, switching, voice, and wireless capabilities in a compact, fixed form factor. Moreover, this router is based on open standards for seamless integration with existing small-branch deployments. Product Description: HPE FlexNetwork MSR958 PoE - router - rack-mountable | Device Type: Router - 8-port switch (integrated) | Enclosure Type: Rack-mountable - 1U | WAN Ports Qty: 2 | Data Link Protocol: Ethernet, Fast Ethernet, Gigabit Ethernet | Data Transfer Rate: 1 Gbps | Performance: Throughput (64-byte packet size): up to 300 Kpps | Capacity: VPN tunnels: 100 IPv4 routing table entries: 10000 IPv6 routing table entries: 5000 IPv4 forwarding table entries: 10000 IPv6 forwarding table entries: 5000 | Network / Transport Protocol: TCP/IP, UDP/IP, L2TP, RSVP, APPN, NTP, ICMP/IP, IPSec, AAL5, ARP, FTP, DHCP, PAP, SFTP | Routing Protocol: OSPF, EGP, RIP, BGP-4, IS-IS, RIP-1, RIP-2, BGP, IGMPv2, IGMP, VRRP, IGMPv3, GRE, OSPFv3, Bidirectional PIM, MSDP, static IPv4 routing, static IPv6 routing, ECMP, RIPng, BGP-4+, MPLS, CIDR, BGP+, URPF | Remote Management Protocol: SNMP

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.
shop.cssi.co.za | sales@cssi.co.za | +27 (11)541-9950

1, SNMP 2, RMON, Telnet, SNMP 3, HTTP, TFTP, CLI | Features: Layer 3 switching, Layer 2 switching, NAT support, VPN support, VLAN support, traffic shaping, port mirroring, Intrusion Prevention System (IPS), Weighted Fair Queuing (WFQ), Weighted Random Early Detection (WRED), sFlow, Spanning Tree Protocol (STP) support, Rapid Spanning Tree Protocol (RSTP) support, Multiple Spanning Tree Protocol (MSTP) support, tunnelling, Access Control List (ACL) support, Quality of Service (QoS), Committed Access Rate (CAR), Link Fragmentation and Interleaving (LFI), PoE+, Unicast Reverse Path Forwarding (URPF), DHCP relay, Management Information Base (MIB), port isolation, packet storm protection, Class of Service (CoS), Loopback, Dynamic Virtual Private Network (DVPN), Multicast Border Gateway Protocol (MBGP), Ethernet over IP (EtherIP), Type of Service (ToS), Group Domain Virtual Private Network (GDVPN), random early detection (RED), ICMP Router Discovery Protocol (IRDP), Management Information Base (MIB) II, Source-Specific Multicast (SSM) | Compliant Standards: IEEE 802.2, IEEE 802.3, IEEE 802.1D, IEEE 802.1Q, IEEE 802.1p, IEEE 802.3ad (LACP), IEEE 802.1w, IEEE 802.1x, IEEE 802.1s | Power: AC 120/230 V | Dimensions (WxDxH): 26.6 cm x 16.1 cm x 4.36 cm | Weight: 1 kg | Manufacturer Warranty: 1-year warranty

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.
shop.cssi.co.za | sales@cssi.co.za | +27 (11)541-9950