




ASUS RS720A- E12-RS24U Socket SP5 Rack (2U) Grey

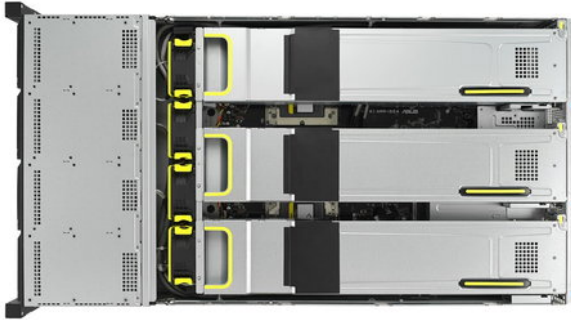

Model: 90SF02E1-M00MZ0

Manufacturer: ASUS

EAN: 4711387716465

Product Code: 325792

R145,974

Warnings: Do not disassemble the unit yourself. | Warnings: Do not throw into regular trash, product requires special disposal. | Warnings: The product may contain components that are harmful to health, use caution when handling. | Sustainability certificates: C-TICK | Ethernet LAN: Yes | Depth: 840 mm | Height: 88.1 mm | Ethernet interface type: 10 Gigabit Ethernet | On/off switch: Yes | Sustainability certificates: CE | Sustainability certificates: BSMI | Chassis type: Rack (2U) | Sustainability certificates: CB | Redundant power supply (RPS) support: Yes | Storage drive sizes supported: 2.5 | Sustainability certificates: Federal Communications Commission (FCC) | Supported memory types: DDR5-SDRAM | Power supply: 2600 W | VGA (D-Sub) ports quantity: 1 | Processor socket: Socket SP5 | Storage drive sizes supported: M.2 | Number of 2.5" bays: 24 | Trusted Platform Module (TPM) version: 2.0 | Supported storage drive types: HDD & SSD | Weight: 19.3 kg | On-board graphics card model: Aspeed AST2600 | Width: 449 mm | Number of DIMM slots: 24 | USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity: 4 | Supported RDIMM clock speeds: 4400 MHz | Package weight: 25.8 kg | LAN controller: Intel X710-AT2 | Processor family: AMD EPYC | LED indicators: Yes | On-board graphics card memory: 64 MB | Reset button: Yes | Compatible processor series: AMD EPYC

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

shop.cssi.co.za | sales@cssi.co.za | +27 (11)541-9950

9004 | Processor manufacturer: AMD | Product colour: Black | Maximum internal memory: 3 TB |
Number of processors supported: 2 | Operating temperature (T-T): 10 - 35 °C | Storage relative
humidity (H-H): 20 - 90% | Ethernet LAN (RJ-45) ports: 2 | Supported DIMM module capacities: 32GB |
Supported DIMM module capacities: 128GB | PCI Express slots version: 5.0 | Storage temperature (T-
T): -40 - 60 °C | Supported DIMM module capacities: 64GB | Trusted Platform Module (TPM): Yes |
Supported RDIMM clock speeds: 4800 MHz | Product colour: Grey | IPMI LAN (RJ-45) port: Yes

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

shop.cssi.co.za | sales@cssi.co.za | +27 (11)541-9950