




## TP-Link Omada AX6000 Ceiling Mount WiFi 6 Access Point

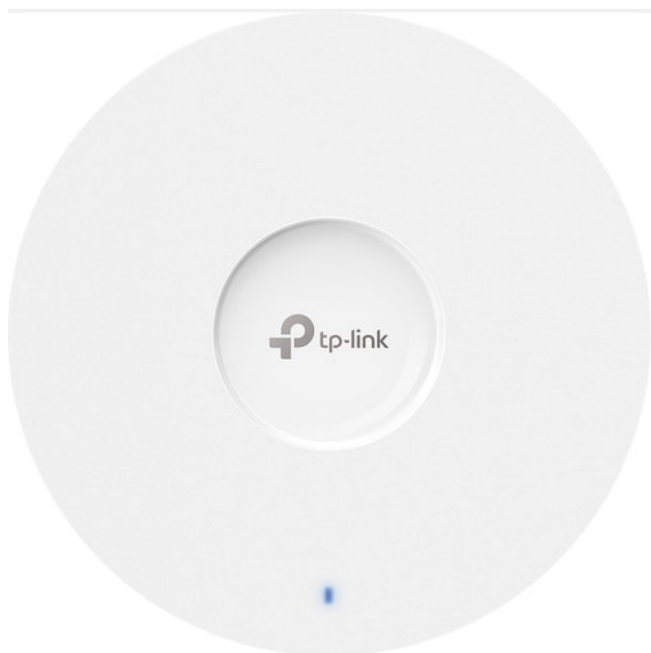

Model: EAP683UR

Manufacturer: TP-LINK

EAN: 8885020621938

Product Code: 333485

## R4,666

Omada | EAP683 UR | Frequency band 2.4 - 6 GHz | Number of users 510 user(s) | Security algorithms HTTPS/SNMP/SNMPv2/SSH/SNMPv3 | 1xEthernet LAN (RJ-45) ports | Power over Ethernet (PoE) Yes | Placement Ceiling,Wall | Colour White | Antenna type Internal | Operating temperature (T-T) 0 - 40 °C Summary: TP-Link Omada AX6000 Ceiling Mount WiFi 6 Access Point. 2.4 GHz, 5 GHz, Maximum data transfer rate: 6000 Mbit/s. Security algorithms: HTTPS, SNMP, SNMPv2, SNMPv3, SSH. Ethernet LAN data rates: 10,100,1000,2500 Mbit/s. Power over Ethernet (PoE). Product colour: White | Vendor Homepage: [www.tp-link.com/en/business-networking/omada-wifi-ceiling-mount/eap683-ur/](http://www.tp-link.com/en/business-networking/omada-wifi-ceiling-mount/eap683-ur/) | 2.4 GHz: Yes | 5 GHz: Yes | 6 GHz: No | Maximum data transfer rate: 6000 | Maximum data transfer rate (2.4 GHz): 1148 | Maximum data transfer rate (5 GHz): 4804 | Ethernet LAN data rates: 10/100/1000/2500 | Frequency band: 2.4 - 6 | Networking standards: IEEE 802.11a/IEEE 802.11ac/IEEE 802.11ax/IEEE 802.11b/IEEE 802.11g/IEEE 802.11n/IEEE 802.3at | Number of users: 510 | Automatic channel scanning: Yes | Automatic channel selection: Yes | MIMO: Yes | MIMO type: Multi User MIMO | Fast roaming: Yes | VLAN support: Yes | Rate limiting: Yes | Band steering: Yes | Airtime Fairness (ATF): Yes | Quality of Service (QoS) support: Yes | BeamForming: Yes | Security

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

algorithms: HTTPS/SNMP/SNMPv2/SNMPv3/SSH | MAC address filtering: Yes | Service Set Identifier (SSID) features: Multiple SSIDs | Access Control List (ACL): Yes | Syslog: Yes | Firmware upgradeable: Yes | Ethernet LAN (RJ-45) ports: 1 | DC-in jack: Yes | Power over Ethernet (PoE): Yes | DC voltage range: 12 | Placement: Ceiling,Wall | Product colour: White | Reset button: Yes | LED indicators: Yes | Antenna type: Internal | Antenna direction type: Omni-directional | Antenna gain level (max): 5 | Width: 220 | Depth: 220 | Height: 32.5 | Package type: Box | Quantity per pack: 1 | Mounting kit: Yes | Quick start guide: Yes | Operating relative humidity (H-H): 10 - 90 | Operating temperature (T-T): 0 - 40 | Storage temperature (T-T): -40 - 70 | Storage relative humidity (H-H): 5 - 90 | Unit Calculated Weight: 1.38 | Product Net Weight: 0.6946 | Unit Calculated Volume: 0.0081 | Units per Shipping Box: 6 | Unit Width: 26 | Units per Pallet: 0 | Shipping Box Height: 30 | Unit Depth: 28.5 | Unit Height: 9 | Name: WRL ACCESS POINT 6000MBPS/OMADA EAP683 UR TP-LINK | Series: Omada | Model name: EAP683 UR

---

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

[shop.cssi.co.za](http://shop.cssi.co.za) | [sales@cssi.co.za](mailto:sales@cssi.co.za) | +27 (11)541-9950