




Cudy FS105D network switch Unmanaged Fast Ethernet (10/100) White

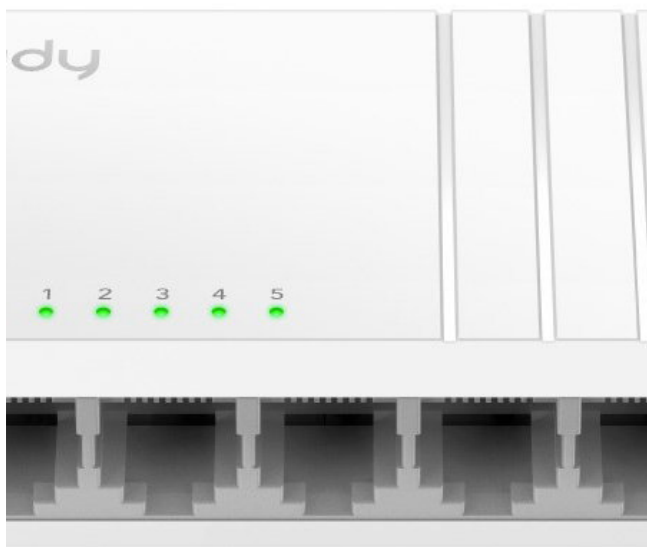

Model: FS105D

Manufacturer: CUDY

EAN: 6971690790035

Product Code: 377572

R254

Ethernet LAN data rates: 10,100 Mbit/s | Warnings: Ensure the unit is adequately ventilated during operation. | Weight: 46.6 g | Warnings: The product is not suitable for disposal in the regular waste bin. Take your used electronic equipment to a recycling centre in accordance with local regulations. | Warnings: Do not open the case or try to repair it yourself. | Networking standards: IEEE 802.3 | Product colour: White | Input current: 0.55 A | LED indicators: LAN | LED indicators: Power | Networking standards: IEEE 802.3x | Networking standards: IEEE 802.3u | Package weight: 100.2 g | Cables included: DC | Height: 24 mm | Switch type: Unmanaged | Power supply included: Yes | Storage relative humidity (H-H): 5 - 90% | Packet buffer memory: 0.448 MB | Basic switching RJ-45 Ethernet ports type: Fast Ethernet (10/100) | MAC address table: 512 entries | Manual: Yes | Full duplex: Yes | Package width: 105 mm | Storage temperature (T-T): -40 - 70 °C | Width: 88 mm | Operating relative humidity (H-H): 10 - 90% | Cable types supported: Cat5 | Cable types supported: Cat3 | Depth: 52.5 mm | Power source: DC | Package depth: 80 mm | Forwarding rate: 0.744 Mpps |

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

shop.cssi.co.za | sales@cssi.co.za | +27 (11)541-9950

Power connector: DC-in jack | Half duplex: Yes | Switching capacity: 1 Gbit/s | Auto MDI/MDI-X: Yes |
Copper ethernet cabling technology: 10BASE-T | Copper ethernet cabling technology: 100BASE-TX |
Package height: 32 mm | Basic switching RJ-45 Ethernet ports quantity: 5 | Warranty period: 1
year(s) | Operating temperature (T-T): 0 - 40 °C | DC input voltage: 5 V

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

shop.cssi.co.za | sales@cssi.co.za | +27 (11)541-9950