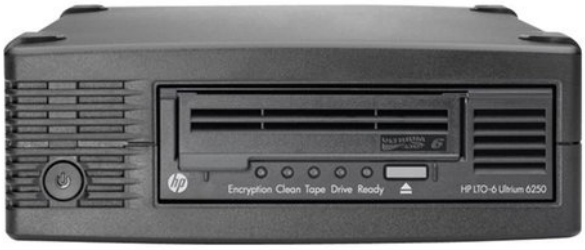


# HPE LTO-6 Ultrium 6250 Ext Tape Drive

Model: EH970A

Manufacturer: HEWLETT PACKARD ENTERPRISE

EAN: 887111210180

Product Code: 523459

## R91,257

The HPE LTO-6 Ultrium 6250 tape drive represents HPE's sixth-generation of LTO tape drive technology capable of large store capacity per cartridge while providing enterprise tape drive monitoring and management capabilities with HPE TapeAssure, ease of use with support for LTFS and AES 256-bit hardware data encryption easy-to-enable security to protect the most sensitive data and prevent unauthorized access of tape cartridges. Capable of data transfer rates up to 1.44 TB/Hour, HPE's exclusive data rate matching feature further optimizes performance by matching speed of host to keep drives streaming and increase the reliability of the drive and media. HPE LTO Ultrium half-height drives are designed for server customers in direct attached storage (DAS) environments where hard disk and system bottlenecks can impede data transfer rates. The Ultrium 6250 tape drives provides investment protection with full read and write backward support with LTO-5 media, and the ability to read LTO-4 cartridges. By more than doubling the compressed capacity of previous generation Ultrium drives, HPE customers now require fewer data cartridges to meet their storage needs, significantly reducing their IT costs and increasing their ROI.

Product Description: HPE StoreEver 6250 - tape drive - LTO Ultrium - SAS-2 | Device Type: Tape drive | Recording Standard: LTO Ultrium 6 | Enclosure Type: External | Interface Type: SAS-2 | Key

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.

Features: Encryption | Dimensions (WxDxH): 22.3 cm x 29.5 cm x 7.7 cm | Weight: 4.65 kg | Storage Removable: LTO Ultrium | Storage Removable Capacity: 2.5 TB (native) / 6.25 TB (compressed) | Supported Tape Cartridges (Read and Write): Ultrium 6, Ultrium 5 | Data Transfer Rate (native): 160 MBps (576 GBph) | Data Transfer Rate (compressed): 400 MBps (1440 GBph) | Designed For: ProLiant DL320e Gen8 Entry, DL360 G7, DL380 G7, DL385p Gen8 Entry, SL230s Gen8 1U Left Half Width Tray, SL230s Gen8 1U Right Half Width Tray, SL230s Gen8 Base 1U Left Tray Server, SL230s Gen8 Base 1U Right Tray Server, SL270s Gen8 1U Left Half Width Tray, SL270s Gen8 1U Right Half Width Tray

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.
shop.cssi.co.za | sales@cssi.co.za | +27 (11)541-9950