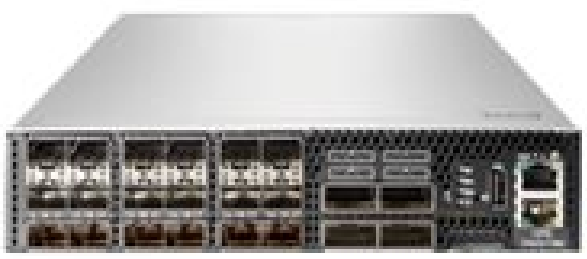

HPE SN2010M 25GbE 18SFP28 Reman Switch (R)

Model: Q9E63AR

Manufacturer: HEWLETT PACKARD ENTERPRISE

Product Code: 523654

R277,657

How can you provide fast, reliable and cost-effective connectivity in the data center with predictable performance and investment protection? The HPE StoreFabric SN2010M Switch is ideal for modern server and storage networks. Supporting port speeds of 1, 10, 25, 40, 50 and 100GbE, they deliver predictable performance and zero packet loss at line-rate. Its unique port counts and half-width form factor allows for up to two HPE StoreFabric SN2010M Switch units to be deployed side-by-side for increased density and high-availability in a single rack unit making it the perfect top-of-rack switch. Storage-specific features combined with an efficient design provides enterprise-level performance with attractive economics and outstanding ROI. Networks built on Hewlett Packard Enterprise M-series switches are fast, reliable, and scalable while also being affordable. This makes these switches ideal for storage, hyperconverged, financial services, Big Data and media and entertainment deployments.

Product Description: HPE StoreFabric SN2010M - switch - 24 ports - Managed - rack-mountable | Device Type: Switch - 24 ports - L3 - Managed | Enclosure Type: Rack-mountable 1U | Subtype: 100 Gigabit Ethernet | Ports: 4 x 100 Gigabit QSFP28 + 18 x 10 Gigabit / 25 Gigabit SFP28 | Performance: Switching capacity: 1.7 Tbps Processing rate: 2.52 Bpps Cut-through latency: 300 ns | Remote

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.
shop.cssi.co.za | sales@cssi.co.za | +27 (11)541-9950

Management Protocol: SNMP, Telnet, SSH, CLI | Features: IGMP snooping, port mirroring, IPv6 support, RSTP support, VRRP support, MSTP support, DCBX support, ACL support, QoS, BFD, IPv4 support, LLDP support, DHCP relay, sFlow v5, 802.1x authentication, 16MB packet buffer, OpenFlow support, Protocol-based VLANs support, Storm Control, RoCE, RED, ECN, PFC, VXLAN, MLAG, OSPF, Root Guard, Loop Guard, Voice VLAN, ToR, STP BPDU Guard, BPDU Filter, PIM | Compliant Standards: X.509 | Power: AC 120/230 V (50/60 Hz) | Power Redundancy: Yes | Dimensions (WxDxH): 43.9 cm x 50.8 cm x 20 cm | Weight: 4.53 kg | Pricing Type: Remarketed

The product information provided is for reference purposes only. Technical specifications, photos, descriptions and prices may change without prior notice. The manufacturer and seller are not responsible for possible data discrepancies or typographical errors. We recommend checking the current information before purchasing.
shop.cssi.co.za | sales@cssi.co.za | +27 (11)541-9950